

Sp.1,5

INSTALLATION




CONNECTION AND FIXING OPTIONS



CONNECTION: JUNCTION BOX



FIXING: DOUBLE SIDED TAPE

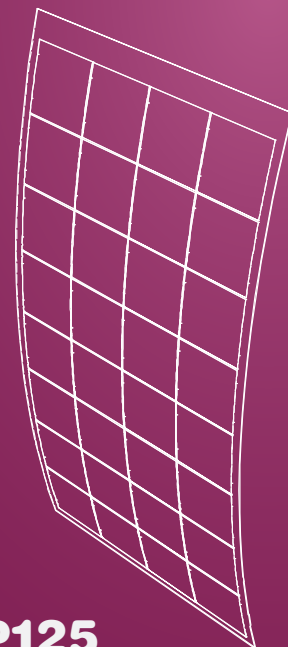

FLEX CP125

DATA SHEET

PHYSICAL CHARACTERISTICS

Lenght	1380 mm
Height	680 mm
Thickness	1,5 mm
Weight	2,35 kg

ELECTRICAL CHARACTERISTICS

Vp max	16,86 V
Ip max	7,61 A
Wp	128,40 W
Vca	20,10 V
Icc	8,10 I
Efficiency (module)	14,44%
Max Bending	25%

SOLBIANFLEX PANELS series CP are made with a special adhesive that allows, thanks to their exibility, easy installation even on surfaces not totally flat.

On request we can supply the complete kit for installation:

- ✓ Photovoltaic Panel
- ✓ Charhe regulator
- ✓ Connectors (pairs)
- ✓ Cable (4 m)

SOLBIAN ENERGIE ALTERNATIVE SRL

Legal and Operative Headquarter: Via Caselette, km.16.200 - 10091 Alpignano (TO) - Phone: +39 011.966.35.12 - Fax: +39 011.966.47.20 - commerciale@solbian.eu
 Office in Avigliana: Viale dei Mareschi, 15 - 10051 Avigliana (TO) - ITALY - Phone: +39 011.932.56.66 - Fax: +39 011.932.56.64 - info@solbian.eu